

INTRODUCING

WOOD FLAKES BOARD

WITH UNMATCHED 700 KG/M³DENSITY

SEAL OF CONFIDENCE








- HIGH DENSITY > 700
 BORER RESISTANCE & TERMITE RESISTANCE
- GOOD SCREW HOLDING CAPACITY
 ENVIRONMENT FRIENDLY
 LOW FORMALDEHYDE EMISSION



Presenting Moist Master with 7D (Density above 700 kg/m³) strength to withstand tough conditions. Moist Master stands tall with its moisture resistance, borer and termite resistance, and strong screw-holding capacity, making it an ideal choice—all while remaining budget-friendly.

Think twice before settling for an ordinary board—choose the 7D-powered Moist Master!

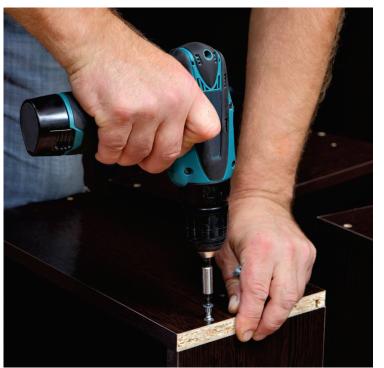







TECHNICAL SPECIFICATIONS OF 7D WOOD FLAKE BOARD - THICKNESS: 18.00MM		
Properties	Unit	TESA Standard
Thickness (mm)	mm	±0.30
Density	Kg/M ³	>700
M.O.R.	N/mm ²	>15
M.O.E.	N/mm ²	>2500
I.B.	N/mm ²	>0.70
Screw withdrawal Face	N	>2500
Screw withdrawal Edge	N	>1500
Thickness swelling, 2hrs	%	<6
Thickness swelling, 24hrs	%	<12
Moisture Content	%	5-15

KEY APPLICATION AREA: • Kitchen Shutters • Furniture - Office, School, Hospital and Home • Wall Paneling • Fixtures • Wardrobes • Decorative Display

FOR PRODUCT SIZES AND THICKNESS, PLEASE REFER SIZE MATRIX











Balaji Action Buildwell Pvt. Ltd.

Regd. Office: G-11, Udhyog Nagar, Peeragarhi, New Rohtak Road, North West Delhi, Delhi - 110 041 Ph.: 011-41120000, 41120020



 $\label{eq:Plant:Plot No. C34, C34 (A) to (D), C3, C6 (A) to (C), Eldeco Sidcul Industrial Park \& Plot No.5,IIE, Sitarganj (US Nagar), Uttrakhand PIN - 262405, India$

CUSTOMER CARE SERVICE: 1800 309 07 07 customerservices@actiontesa.com www.actiontesa.com

TESA PRODUCT RANGE: • Pre-Laminated & Plain Particle Board • Pre-Laminated & Plain MDF & HDHMR Board • BOILO - BWP FR HDF Board • Abraze - Highly Scratch Resistant Prelaminated MDF Board • Ornamatte - Matte Finishes Board • HDHMR Door • HDF Laminated Flooring • Embossed HDF Board • High Gloss UV Board • High Gloss Acrylic Board



DOWNLOAD THE
TESA CONNECT APP
ON YOUR MOBILE
SCAN THE QR CODE

